


Enable DEBUG mode of plugin LOG

In order to get more information about the problems, it is required to enable the Debug mode of the plugin LOG. To do this, the following steps must be followed:

Go to Configuration System Logging and Profiling Configure logging level for another package

Note: If instance is restarted, this configuration is lost and the steps would have to be repeated.

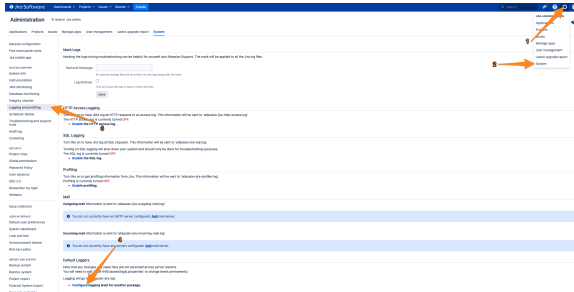

Add es.excentia on "Package name" field, select DEBUG on Logging Level and clic Add button

Configure logging level for another package.

Package name

Log4j logger name (e.g. 'com.atlassian.bonfire')

Logging Level

Repeat step with package es.sonarqube

Configure logging level for another package.

Package name

Log4j logger name (e.g. 'com.atlassian.bonfire')

Logging Level

When the problem is solved, remember to disable the LOG from the same configuration page by selecting OFF from the list.

es.excentia	DEBUG	TRACE	INFO	WARN	ERROR	FATAL	OFF
es.sonarqube	DEBUG	TRACE	INFO	WARN	ERROR	FATAL	OFF