# **Copy User Permissions**


With this premium feature you will be able to assure that a user (user B) has the same permissions that another one (user A).

#### Where can I find it?

You would be able to find this functionality at user management. To access it you should click under the cog icon management option:



and then choose user



After that you could access the copy user permission functionality under Excentia Admin Tools section:




# How does it work?

You should select two user, user A and user B. By default, the plugin will include user B into:

- Groups user A belogns.
- Project roles in wich user A is one of its members
- Any section of every permission scheme where user A appears as individual user.
- Any issue level where user A appears as individual user in every issue security scheme.

Furthermore you will be able to choose any of the next options:

- Add user B to all notifications scheme where user A appears as individual user.
- Set user B as project leader in those projects where current leader is user A.
- Set user B as component leader in those project components where current leader is user A.
- Assign all issues which are currently assigned to user A to user B

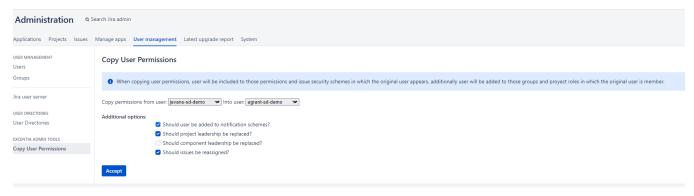

Once you click in the Accept button you would be redirected to a results page where you could be what actions has been done.

### **Project Roles**

1 Project: DESK - Role: Administrators - No action performed, user was already member of the role

# **User Groups**

- ira-servicedesk-users: No action performed, user was already member of the group
- 1 jira-software-users: No action performed, user was already member of the group

#### Permission Schemes

Esquema de permisos de Jira Service Desk para el proyecto DESK: User has been added to the permission scheme

# Issue Security Schemes

1 Prueba: No action performed, user was already added to the issue security scheme

# **Notification Schemes**

1 Default Notification Scheme: No action performed, user was already added to the notification scheme

# **Project Leader Changes**

1 No action performed, user does not lead any project

# Reassignments

1 No action performed, there were no issues assigned to

